



Big Dutchman®



UNIVENT-Starter 680-plus

The new generation of UNIVENT-Starter
for successful pullet rearing

UNIVENT-Starter 680-plus

The **plus** in height improves ventilation and increases bird welfare

The UNIVENT-Starter rearing system from Big Dutchman is a true bestseller. This well-proven system not only provides excellent rearing results, but is also of a high quality. For its newest generation, UV-S 680-plus, the compartment height has been increased

by 40 mm. In warm climates especially, this additional height creates a much better air exchange in all tiers of the system, which ensures pullet uniformity and improves bird welfare.

UNIVENT-Starter 680-plus consists of two

separate tiers to satisfy the differing needs of day-old chicks and pullets:

- ✓ the start tier and
- ✓ the grow tier.

IMPORTANT FEATURES OF THE UNIVENT-STARTER CAGE




OptiCoat provides the ideal coating of all wire and sheet metal parts: three to four times better corrosion protection compared with galvanized materials

Higher nipple drinker position also in the start tier: better water intake by the birds

Footrail made of plastic: no corrosion and no sharp edges or wire ends, i.e. no risk of injury for the birds

Open design of the lateral divisions: improved ventilation

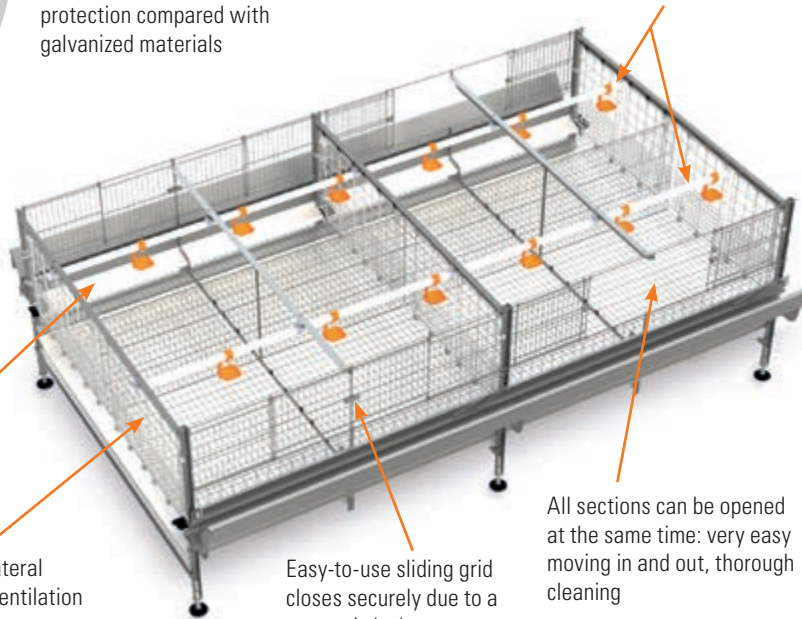

Easy-to-use sliding grid closes securely due to a magnetic lock

All sections can be opened at the same time: very easy moving in and out, thorough cleaning

ADVANTAGES


- ✓ technically mature system;
- ✓ modular design allows flexible arrangement of start and grow tiers;
- ✓ very easy to use;
- ✓ remarkably low mortality during rearing (often below two per cent);
- ✓ feed trough with inward rim minimises feed wastage;
- ✓ feed troughs are mounted on supports for increased stability;
- ✓ simple assembly of three to eight tiers;
- ✓ high functional reliability;
- ✓ the central nipple drinker adjustment is located in the feeding end set to make distances shorter and to save time;
- ✓ OptiCoat protects against corrosion, thus increasing the system's service life;
- ✓ fewer screw, more plug connections for reduced assembly times.



View of the feeding windows in the start tier and of the plastic footrail



No more feed losses due to the new height adjustment for the feeding windows in the start tier

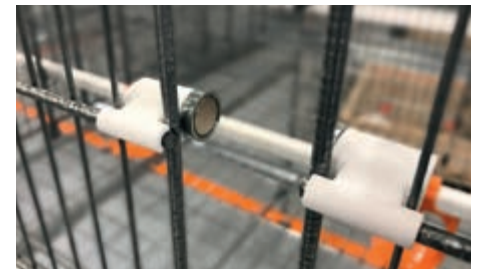

Magnetic lock at the fronts for secure closing



Big Dutchman

Europe, Middle East & Africa:
Big Dutchman International GmbH
P.O. Box 1163 · 49360 Vechta, Germany
Phone +49(0)4447 801-0 · Fax -237
big@bigdutchman.de
www.bigdutchman.de

USA: Big Dutchman, Inc.
Phone +1 616 392 5981 · bigd@bigdutchmanusa.com
www.bigdutchmanusa.com

Brazil: Big Dutchman (Brasil) Ltda.
Phone +55 16 2108 5310 · bdbbr@bigdutchman.com.br
www.bigdutchman.com.br

Russia: 000 "Big Dutchman"
Phone +7 495 2295 161 · big@bigdutchman.ru · www.bigdutchman.ru

Asia/Pacific: BD Agriculture (Malaysia) Sdn. Bhd.
Phone +60 3 334 83 555 · bdasia@bigdutchman.com · www.bigdutchman.com

China: Big Dutchman (Tianjin) Livestock Equipment Co., Ltd.
Phone +86 10 5632 0188 · bdcnsales@bigdutchman.com
www.bigdutchmanchina.com